

# OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 8 TOWNSHIP 16 RANGE 4

DATE: 9-14-05

PARTY CHIEF: Wilcoxon

CREW: \_\_\_\_\_

TYPE OF MARKER: Harrison


METHOD OF ESTABLISHMENT: County: 5-5-01

IN. S.P.C. E ZONE NAD '83

NAME: 16040802

N: 511514.2091(m)

E: 61846.3588(m)

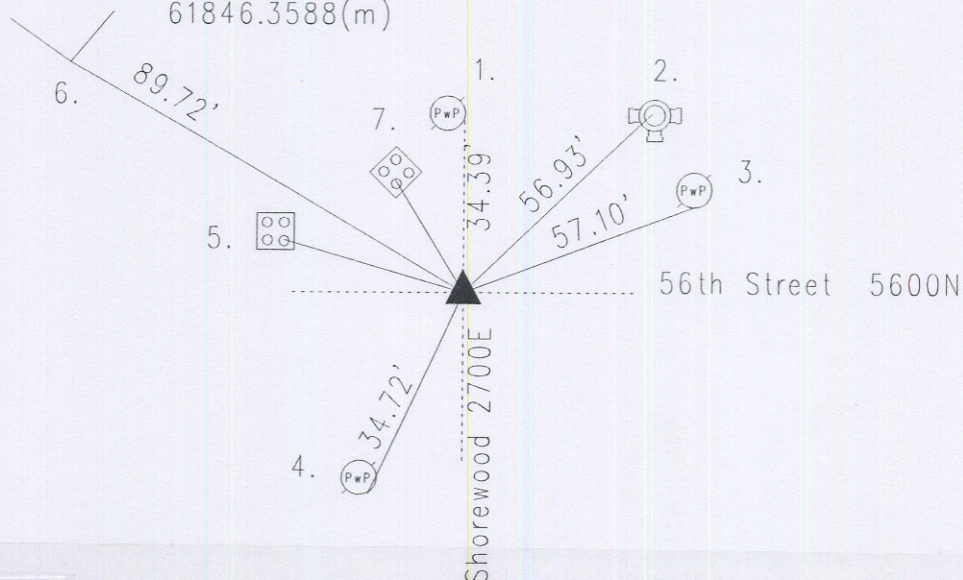

## 16040802 N Q

CORNER HISTORY: Corner originally set as a post in 1820 by John Hendricks with witness: 24" beech S 28 E 15 links; 8" dogwood N 20 E 26 links per Marion County Atlas pg. 11. Reference dated 2-1-1858 called note that they set the center of section by running S to N and E to W so they had the N Q of 8-16-4 per Washington Township Legal Survey Book pg. 23. A survey per Washington Township Legal Survey Book pg. 96 called a distance to the N Q corner. A survey per page 115 called a distance to the N Q corner. Reference dated 10-21-1943 called found a small stone 6" down on top of a larger stone. Reference dated 1-26-1971 by McLand called railroad spike found 3" down. Reference dated 11-24-75 by Wilcoxon called railroad spike found. Reference dated 8-20-87 by Gries called found railroad spike. Reference dated 11-09-1996 by Wilcoxon called same. Reference dated 5-5-01 by Whiteside called survey mark nail set per ties. Reference dated 9-13-05 by Wilcoxon called dug corner found  $\frac{1}{2}$ " iron rod 0.6'E and 0.8'S 5" down. Set Harrison per ties, no other points were found.

16040802

REF.	DISTANCE	DESCRIPTION
1.	34.39'	Due n to PK nail F PwP no# 6"up
2.	56.93'	Top nut of fire hydrant
3.	57.10'	PK nail S PwP#59-341 6"up
4.	34.72'	PK nail SF PwP#184-340B 12"up
5.	36.17'	Cut 'x' SF bolt of railroad crossing sign base
6.	89.72'	Southerly corner of Address 3000
7.	28.71'	Cut 'x' S-bolt of railroad crossing sign base